

# RD212

## Hydraulic rock drill

### Key features


Power class	11 kW
Percussion rate	63 Hz
Hole diameter bolting	33 - 41 mm
Hole diameter drilling	35 - 41 mm
Hole diameter reaming	76 - 89 mm
Operating pressure	
Percussion	100 - 200 bar
Rotation (max.)	210 bar
Rotation motor size	125 cc
Shanks bolting	R32 female R38 male (no flushing) T38 male (no flushing)
Weight	90 kg

Sandvik RD212 high-frequency hydraulic rock drill is designed for bolting and face drilling rigs.

Sandvik RD212 can be used in electrically-controlled and hydraulically-controlled Sandvik drill rigs.

Sandvik RD212 is a compact, robust and universal hydraulic percussive rock drill. It is known for its hydraulic efficiency and high penetration rate.

Sandvik RD212 has excellent serviceability through modular construction and visual wear indicators. Service interval is 500 percussion hours.

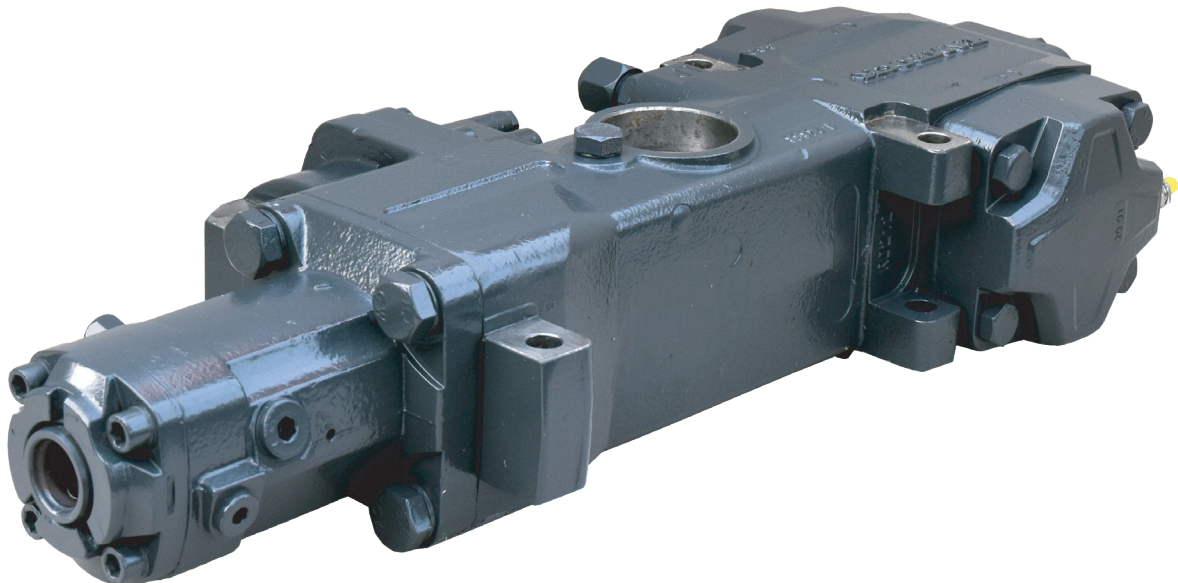

**Technical drawing**

All dimensions in mm

**Rotation mechanism**

Motor	Orbit type
Motor type	125 cc
Torque (at 175 bar)	420 Nm
Rotation speed	0 - 300 rpm
Flow (at max.speed)	40 l/min

**Shank lubrication**

Air flow	150 - 250 NI/min
Pressure	4 - 5 bar
Oil consumption	100 - 200 g/h

**Flushing pressure**

Max. pressure (air / water)	15 bar
-----------------------------	--------

**Accumulators**

Accumulator gas	Nitrogen N2
High pressure (HP)	40 bar
Low pressure (LP)	4 bar
Filling valve	Vg8 DIN7756

**Options**

Special tools for RD212 / Complete set	Specification sheet TS2-533
Special tools for RD212 / Field tools set	Specification sheet TS2-532

