

Declaration of Performance

No. HBS-2026-001 R38-420

1. Product type:

Self-drilling soil and rock nails

DSI® Hollow Bar System R38-420

2. Intended use/es:

Soil and rock nails are intended to stabilise soil and rock by the installation of passive tensile elements.

3. Manufacturer:

DSI Underground Austria GmbH
Alfred-Wagner-Straße 1, 4061 Pasching / Linz, Austria

4. System of assessment and verification of constancy of performance:

1+

5. European Assessment Document:

EAD 160088-00-0102

6. European Technical Assessment:

ETA-21/0869 of 2.8.2022

7. Technical Assessment Body (TAB):

Austrian Institute of Construction Engineering
Schenkenstrasse 4, 1010 Vienna, Austria

8. Accredited certification body (NB 1379):

Technical University of Graz

9. Declared performance/s:

| | Essential characteristic | Intended Use | | |
|--|--|---|---|---|
| | | Temporary Soil and Rock Nail | Permanent Soil and Rock Nail | |
| | | | Bare Soil and Rock Nail | Hot-dip galvanised Soil and Rock Nail |
| 1 | Resistance to static load of anchorages and coupler assemblies | $F_{p0.2, nom}$: 350 kN, $F_{m, nom}$: 420 kN, Slip at 65 % $F_{p0.2, nom}$ coupling: 0.9 mm, anchorage: 0.3 mm | | |
| 2 | Resistance to fatigue of anchorages and coupler assemblies | $F_{p0.2, nom}$: 350 kN, $2\sigma_a$: 80 N/mm ² | | |
| 3 | Load transfer to structure | $f_{cm, 0}$: 38 N/mm ² , $F_{m, nom}$: 420 kN | | |
| 4 | Corrosion protection for temporary rock and soil nails | Cover of cement grout mortar \geq 15mm Attachment 1, Figure 1 | - | |
| 5 | Corrosion protection, sacrificial corrosion allowance for permanent rock and soil nails | - | Sacrificial corrosion Attachment 1, Figure 1, Attachment 1, Table 1 | - |
| 6 | Corrosion protection, sacrificial corrosion allowance for hot-dip galvanised permanent rock and soil nails | - | | Sacrificial corrosion Attachment 1, Figure 1, Attachment 1, Table 2 |
| 7 | Impact energy and torque | E_S : 140 Joule, M_t : 1000 Nm to E_S : 200 Joule, M_t : 730 Nm | | |
| Hollow bar of welded steel tube | | | | |
| 8 | Shape | Attachment 1, Figure 2 | | |
| 9 | Dimensions | Diameter External: 37.8 mm, Internal: 21.5 mm | | |
| 10 | Surface geometry | Rope thread, pitch 12.7 mm, average thread height 1.6 mm, f_R : 0.13 | | |
| 11 | Mass per metre | 5.15 kg/m, deviation: - 4.5 % to + 12 % | | |
| 12 | Cross sectional area | 660 mm ² | | |
| 13 | Strength characteristics | $F_{p0.2, nom}$: 350 kN, $F_{m, nom}$: 420 kN, $F_m/F_{p0.2}$: \geq 1.15 | | |
| 14 | Elongation at maximum force | $A_{gt} \geq$ 5 % | | |
| 15 | Modulus of elasticity | 205 000 N/mm ² | | |
| 16 | Weld at flattening | No cracking at close flattening prior to rolling | | |
| 17 | Weld at drift expansion | No cracking at relative expansion \geq 110 % with 60 ° mandrel prior to rolling | | |
| 18 | Resistance to fatigue | $F_{p0.2, nom}$: 350 kN, $2\sigma_a$: 190 N/mm ² , 2 000 000 cycles | | |
| 19 | Bond strength | τ_{ak} : 5.1 N/mm ² , f_{cm} : 55 N/mm ² | | |
| 20 | Hot-dip galvanising | - | - | \geq 85 μ m |

The performance of the product identified above is in conformity with the set of declared performance/s.

Signed for and on behalf of the manufacturer by:

Signed by:

 8B67F3C8A00D446...

Dipl.-Ing. Dominik Johannes Dendl

Pasching, on 08.04.2026

Declaration of Performance

No. HBS-2026-001 R38-420 Attachment 1

Figure 1: Coupler, Nut

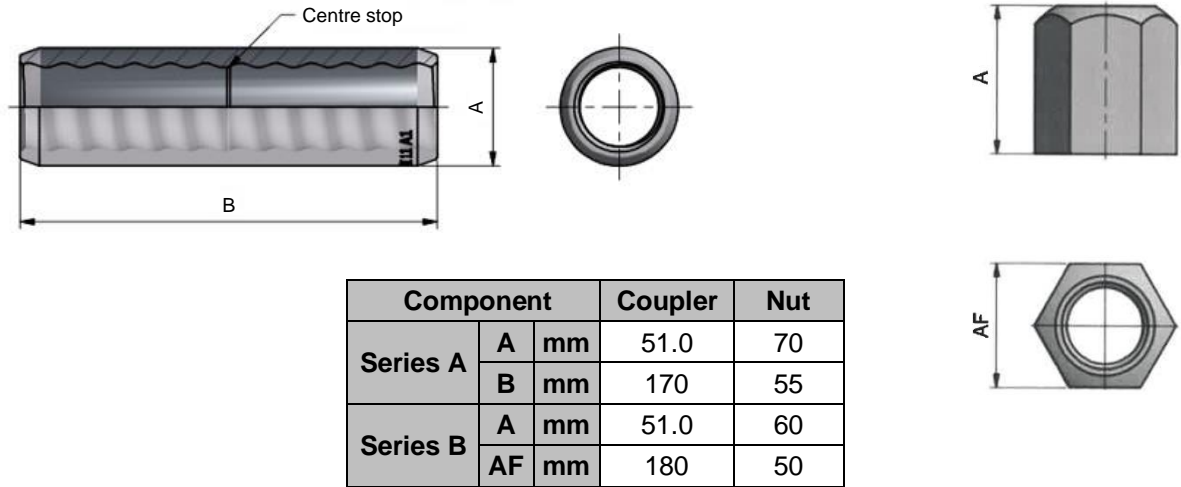


Table 1: Bare steel

| Time in years | Corrosion load | | |
|---------------|-----------------------------------|--------|------|
| | Low | Medium | High |
| | Sacrificial corrosion depth in mm | | |
| 2 | 0 | 0 | 0.2 |
| 7 | 0.2 | 0.2 | 0.5 |
| 30 | 0.3 | 0.6 | - |
| 50 | 0.5 | 1.0 | - |

Table 2: Galvanised steel

| Time in years | Corrosion load | | |
|---------------|-----------------------------------|--------|------|
| | Low | Medium | High |
| | Sacrificial corrosion depth in mm | | |
| 2 | 0 | 0 | 0.1 |
| 7 | 0 | 0.1 | 0.4 |
| 30 | 0.1 | 0.4 | - |
| 50 | 0.3 | 0.7 | - |

Figure 2: Hollow bar

