

Cable Sling Tension Block


Product code: CBPB
Category: Bolt Fittings

Introduction

Used for Sling System with the 15.2mm Cable Bolt

Key features

- The Cable Sling Tension Block optimises the performance of the Cable Bolt by eliminating premature failure due to stress raisers. The twisting of the block when the system is under tension induces these stresses. The factors that contribute to the relief of the stress are:
 - The length of the block. The longer the block, the less 1. twisting results when the system is under load.
 - The radius of curvature of the cable. The greater the 2. radius of curvature, the greater area over which the stress is spread. The pipe yields as the load increases, forming a curve.
- Can be either supplied black or galvanized.

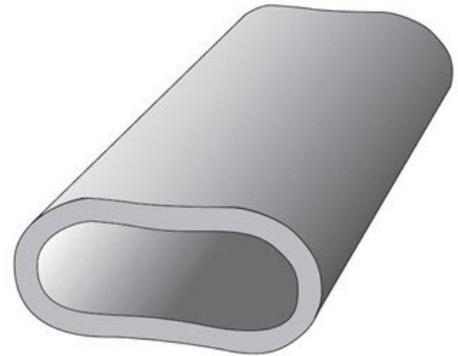

Product Code Guide

CBPBLOCK

Physical Properties

| Length (mm) | Height (mm) | Width (mm) | Weight (g) |
|-------------|-------------|------------|------------|
| 150 | 30 | 60 | 810 |

Notes

Quality Assured to ISO 9001:2015

Packaging

Pipe Blocks are normally supplied in hessian bags

Typically, plates used

| Product Group | Tensioner | Cable Bolt | Barrel and Wedge |
|---------------------|---|---|---|
| Product Imagery |  |  |  |
| Product Code Prefix | TEN | CB | BLW |

Phone app

Want to know more; our full product range, knowledge centre, and other details are available via the App; available on iOS and Android devices by searching “Ground Support”.



iOS



Android

Legal disclaimer

All dimensions, weights, quantities, and specifications are those applicable at the time of this publication and may be amended from time to time. Please contact your local representative for final confirmation of any key specifications.